


2LC

½" CTS-2" IPS (16 MM-60 MM)



MADE FOR
UNDERGROUND
CONSTRUCTION

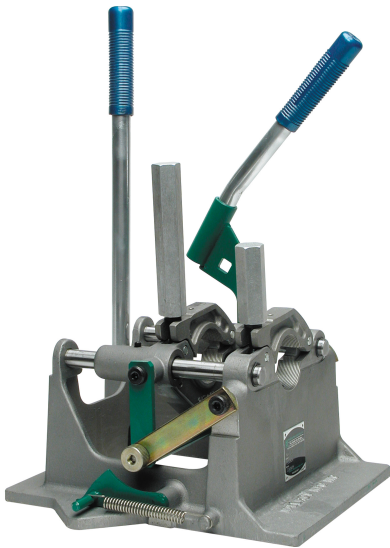

ABOUT THE 2LC

The 2LC is designed to butt fuse ½ CTS to 2" IPS (16mm to 60mm) pipe in a number of configurations, including tees, ells, and other fittings.

With a semi-automatic locking cam (LC) system, the 2LC expertly maintains force during the fusion cycle. Serrated jaws and inserts keep the pipe from slipping during fusion, and its patented Centerline Guidance System ensures equal distribution of force around the joint. A hard-anodized aluminum surface keeps this pint-sized powerhouse working in even the most demanding conditions.

A range of accessories are available for the 2LC, including a Manual Fusion Machine Stand that brings fusion operations to a comfortable level.

STANDARD FEATURES

- ✓ Manual
- ✓ Compacta y durable
- ✓ Ventaja mecánica de 5,8 a 1
- ✓ Capaz de fusionar conectores en T, codos y otros
- ✓ Mecanismo de bloqueo para mantener la fuerza durante el ciclo de enfriamiento
- ✓ Sistema patentado de guía central para una distribución equitativa de la fuerza alrededor de la unión
- ✓ Superficies de aluminio anodizado duro para resistencia a la corrosión
- ✓ Insertos y mordazas con bordes dentados para evitar que el tubo se deslice durante el proceso de fusión



SPECIFICATIONS

MODELS		POWER		SHIPPING DIMENSIONS	
A217201	100 V-120 V	100 V-120 V Heater	100-120V, 800 Watts, 60 Hz	Length	24" (609.6 mm)
A217202	220 V-240 V	200 V-240 V Heater	220-240V, 800 Watts, 60 Hz	Width	17" (431.8 mm)
WEIGHTS		Facer	Hand-Operated	Height	20" (508 mm)
Carriage	23 lbs. (10.4 Kg)	100 V-120 V Heater Plug type	NEMA 5-15P	INCLUDES	
Heater	6 lbs. (2.7 Kg)	200 V-240 V Heater Plug type	NEMA 6-15P	Máquina de fusión, calentador, refrentador, soporte de calentador/refrentador termoaislado y juego de tornillos/destornillador.	
Facer	7.9 lbs. (3.6 Kg)	MACHINE DIMENSIONS			
Shipping Weight	48 lbs. (21.8 Kg)	Machine Length	13" (330.2mm)		
		Machine Width	14" (355.6mm)		
		Machine Height	15" (381mm)		